



Content of delivery: 1x Extension Cable, 2x Connectors, 1x Quick Installation Guide

INSTAR Deutschland GmbH hereby ensures that you will not lose your warranty by installing this extension cable.

ATTENTION: Any damages caused by the user by faulty installation are excluded of the warranty.



Step 1: Remove the top cover by gently pulling it in the direction of the lens. Use an Allen Key to remove the 4 screws in the back plate of the camera. Open the e by removing the 4 female hex screws on the backside of the housing. Also remove the male hex screw in the middle.



Step 2: Carefully pull the mainboard midway out of the housing. Next unplug the two connectors (see figure) from the mainboard and remove the cable retainer, which fixes the black cable.




Step 3: Remove the pins from the connectors by using a small screwdriver to loosen the barbed hook and pulling the cables out one by one.



Step 4: If all pins are removed pull the black cable through the back plate.

Step 5: Please remove the male hex screw from the old cable and impose it on the new cable. Pull the new cable through the back plate. Mind that the cable overlaps 0,5 cm on the inside to prevent it from slipping through. Fasten the male hex screw.

Cable assignment:

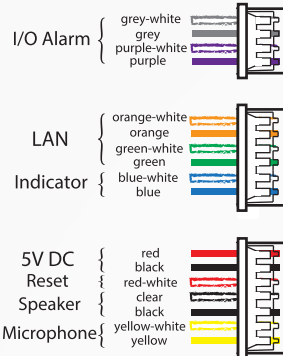

Step 6: Now plug all pins to the connector in the same order as shown in the left figure. Afterwards plug the connector to the mainboard. In this setup **2 cables are not used**. Keep those isolated inside the housing. Move the mainboard back to its housing and take care, that the antenna is located on the top side. Assemble the 4 female hex screws.